


23 SCFM



Type M-1



One Way Shut-Off  
or  
Straight Through




PLUG  
(STEEL)

PLUG  
(BRASS)

ONE WAY SHUT-OFF  
COUPLER  
(BRASS)




STRAIGHT THROUGH  
COUPLER  
(BRASS)

## FEMALE THREAD




	Part No.	Part No.	Part No.	Part No.
1/8" (F) NPT	21.1122	21.1123	21.1423	21.1426
1/4" (F) NPT	21.1142	21.1143	21.1443	21.1446

## MALE THREAD



	Part No.	Part No.	Part No.	Part No.
1/8" (M) NPT	21.1222	21.1223	21.1523	21.1526
1/4" (M) NPT	21.1242	21.1243	21.1543	21.1546

## IDEAL FOR INSTRUMENTATION

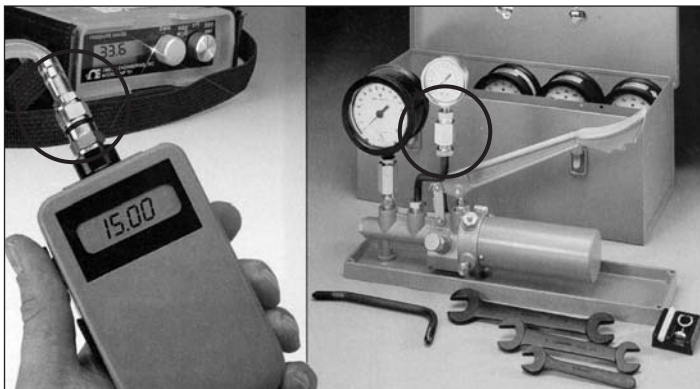

## Applications

- Ideal for instrumentation, compressed air, water, gas, vacuum and most chemicals

## Features

- Available in either straight through or single shut-off valve model
- Allows a smooth unrestricted flow of fluids
- Fully automatic

## Specifications

### Maximum Working Pressure

250 PSI

### Working Temperature

-40°C to 107°C (-40°F to 225°F)

### Air Flow

23 SCFM

### Construction

Body : Brass

Locking Sleeve : Plated Steel

Seals : Buna-N

Locking Balls : Stainless Steel