


**NEW**

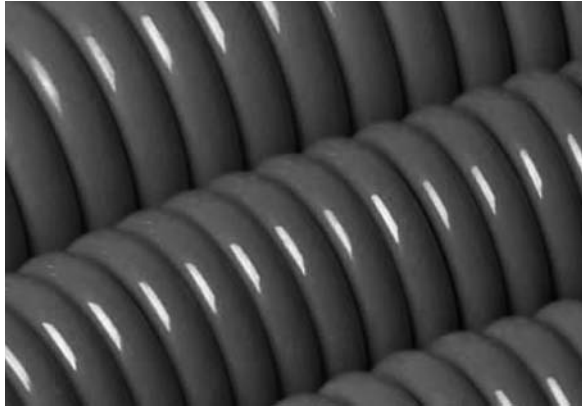

### Specifications

**Maximum Working Pressure**

See table beside

Safety factor a 1:2.5

**Working Temperature**

-20°C to 60°C (-4°F to 212°F)

**Material**


Ester-based polyurethane

**Colours**

Green

Designed for breathing air and compressed air applications, CEJN spiral non-braided hose features a green, esterbased PUR construction and anti-spark protection. Its resistance to sparks and scorching makes it suitable for applications near welding equipment. The hose is lighter in weight, easier to handle, and more flexible than ordinary rubberhose. It is offered in a spiral hose version and in hose kits containing couplings and nipples.

Specific sizes of the hose comply with Standard EN14594:2005 for breathing air use, when used with approved breathing air filters and masks.

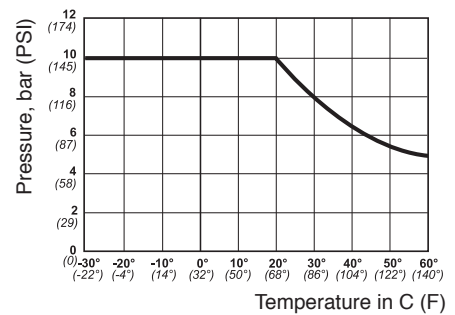

Part No.	Size ID x OD	Service Length (m)	Total Hose Length	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Work. Pressure bar/PSI at 20°C
47.5604	6.5 x 10.0	4.0	5.0	930	500	330	100	52	10/45
47.5606	6.5 x 10.0	6.0	7.5	1120	500	520	100	52	10/45
47.5804	8.0 x 12.0	4.0	5.0	920	500	320	100	65	10/45
47.5806	8.0 x 12.0	6.0	7.5	1100	500	500	100	65	10/45

