

RUBBER HOSES (SERIES 49)

FLEXIMAX HOSE

Economical hose which remains flexible even at cold temperatures
Ideal for construction and garages



Brick Red



Red

PROMAX HOSE

Resistant to oil, abrasion and to punctures
Remains flexible under cold temperatures
Special design for heavy duty use, metallurgy and welding application
Ideal for construction, industry, and garages

SUPERMAX HOSE

Highly resistant, flexible and light lock-on hose
High resistance to oil, and remains flexible even at very cold temperatures
Ideal for construction, garages, mining, forestry and industrial work



Black



Green

VALUFLEX HOSE

Lock-on hose with no silicone content
Very light and flexible, high resistance to oil
Specially designed for paint shops and the petrochemical industry



Sand Yellow

INDUSTRIAL HOSE

Ultra-resistant thick body hose
Excellent resistance to abrasion and to punctures
Special design for high pressure air tools
Ideal for construction, mining, and forestry

THERMOPLASTIC HOSES (SERIES 50)




Light Blue

THERMOMAX HOSE

Flexible, very light and economical hose
Reinforced body resistant to ozone and abrasion that doesn't mark surfaces
Ideal for industrial interior use

MAXIFLEX HOSE

Economical transparent hose, very flexible and light
Its easy to clean reinforced body resists to ozone and to abrasion
Ideal for the plastic industry, food processing and packaging



Transparent




Dark Blue

POLYMAX HOSE

This ergonomic hose is 50% lighter than rubber
Excellent resistance to abrasion, remains flexible under very cold temperature
Easy to clean, body with good resistance to oil and solvents
Ideal for stapling and nailing, paint shops and assembly lines

POLYPRO HOSE

FDA compliant ergonomic transparent hose
50% lighter than rubber
Clear body easy to clean with good resistance to oil and solvents
Ideal for robotics, food industry and construction



Clear

ULTRAFLEX HOSE

Hose of High flexibility at low temperature.

Made of light and superior quality polyurethane material
Good resistance to abrasion



Yellow

BRICK RED



Applications

- Ideal for pneumatic tools, air or water
- For construction, garages and paint shops, agriculture, and industrial work

Features

- Stays flexible at very cold temperatures
- Abrasion resistant

Specifications

Working Temperature

-40°C to 93°C (-40°F to 200°F)

Construction

Cover and tube : EPDM Rubber
Reinforcement : Synthetic Fibers

Color

Brick Red

Recommended Fittings

Hose Barb (Series 33) and Hose Clamps (Series 39)




Flexible even at very low temperatures

HOSE (500' REEL APPROX.)



200 PSI



Part No.	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
49.1400	1/4	0.48	200 PSI
49.1500	5/16	0.55	200 PSI
49.1600	3/8	0.66	200 PSI
49.1700	1/2	0.82	200 PSI
49.1800	3/4	1.08	200 PSI
49.1900	1	1.39	200 PSI (450' Reel)

HOSE ASSEMBLY WITH FITTINGS



200 PSI




Part No.					Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
15'	25'	35'	50'	100'			
49.1415	49.1425	49.1435	49.1450	49.1490	1/4	1/4	200 PSI
49.1515	49.1525	49.1535	49.1550	49.1590	5/16	1/4	200 PSI
49.1615	49.1625	49.1635	49.1650	49.1690	3/8	3/8	200 PSI
49.1616	49.1626	49.1636	49.1656	49.1696	3/8	1/4	200 PSI
49.1715	49.1725	49.1735	49.1750	49.1790	1/2	1/2	200 PSI
49.1716	49.1726	49.1736	49.1756	49.1796	1/2	3/8	200 PSI
49.1815	49.1825	49.1835	49.1850	49.1890	3/4	3/4	200 PSI
49.1915	49.1925	49.1935	49.1950	49.1990	1	1	200 PSI

HOSE (500' APPROX. REEL)



250 PSI



Part No.	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
49.2400	1/4	0.48	250 PSI
49.2500	5/16	0.55	250 PSI
49.2600	3/8	0.69	250 PSI
49.2700	1/2	0.84	250 PSI
49.2800	3/4	1.13	250 PSI

HOSE ASSEMBLY WITH FITTINGS



250 PSI




Part No.					Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
15'	25'	35'	50'	100'			
49.2415	49.2425	49.2435	49.2450	49.2490	1/4	1/4	250 PSI
49.2515	49.2525	49.2535	49.2550	49.2590	5/16	1/4	250 PSI
49.2615	49.2625	49.2635	49.2650	49.2690	3/8	3/8	250 PSI
49.2616	49.2626	49.2636	49.2656	49.2696	3/8	1/4	250 PSI
49.2715	49.2725	49.2735	49.2750	49.2790	1/2	1/2	250 PSI
49.2716	49.2726	49.2736	49.2756	49.2796	1/2	3/8	250 PSI
49.2815	49.2825	49.2835	49.2850	49.2890	3/4	3/4	250 PSI

Industrial quality, oil resistant hose

HOSE (500' APPROX. REEL)



250 PSI



Part No.	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
49.3400	1/4	0.50	250 PSI
49.3500	5/16	0.62	250 PSI
49.3600	3/8	0.69	250 PSI
49.3700	1/2	0.84	250 PSI
49.3800	3/4	1.09	250 PSI
49.3900	1	1.38	250 PSI

HOSE ASSEMBLY WITH FITTINGS - 1 BRAID



250 PSI



15'	25'	35'	50'	100'	Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
49.3415	49.3425	49.3435	49.3450	49.3490	1/4	1/4	250 PSI
49.3515	49.3525	49.3535	49.3550	49.3590	5/16	1/4	250 PSI
49.3615	49.3625	49.3635	49.3650	49.3690	3/8	3/8	250 PSI
49.3616	49.3626	49.3636	49.3656	49.3696	3/8	1/4	250 PSI
49.3715	49.3725	49.3735	49.3750	49.3790	1/2	1/2	250 PSI
49.3716	49.3726	49.3736	49.3756	49.3796	1/2	3/8	250 PSI

HOSE (500' APPROX. REEL)



300 PSI



Part No.	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
49.4400	1/4	0.62	300 PSI
49.4500	5/16	0.69	300 PSI
49.4600	3/8	0.75	300 PSI
49.4700	1/2	0.88	300 PSI
49.4800	3/4	1.19	300 PSI
49.4900	1	1.50	300 PSI

HOSE ASSEMBLY WITH FITTINGS - 2 BRAID



300 PSI



15'	25'	35'	50'	100'	Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
49.4415	49.4425	49.4435	49.4450	49.4490	1/4	1/4	300 PSI
49.4515	49.4525	49.4535	49.4550	49.4590	5/16	1/4	300 PSI
49.4615	49.4625	49.4635	49.4650	49.4690	3/8	3/8	300 PSI
49.4616	49.4626	49.4636	49.4656	49.4696	3/8	1/4	300 PSI
49.4715	49.4725	49.4735	49.4750	49.4790	1/2	1/2	300 PSI
49.4716	49.4726	49.4736	49.4756	49.4796	1/2	3/8	300 PSI

RED



Applications

- Ideal for air tools, water, oil, gasoline, kerosene, or diesel.
- For construction, garages, paint or welding shops, agriculture, manufacturing plants, mining or forestry

Features

- Excellent oil resistance
- Stays flexible even at very cold temperatures
- Thick wall provides resistance to punctures, abrasion and ozone

Specifications

Working Temperature

-40°C to 100°C (-40°F to 212°F)

Construction

Cover : Synthetic rubber

Nitrile C₂ (Modified Nitrile)

Tube : Synthetic rubber

Nitrile C

Reinforcement : High Tensile Braided Synthetic Fibers

Color

Red

Recommended Fittings

Hose Bard (Series 33)

Hose Clamps (Series 39)



Series 49

SUPERMAX Neoprene Lock-On Hoses

BLACK




Light, flexible and highly resistant lock-on hose

HOSE (500' APPROX. REEL)



250 PSI



Part No.	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
49.5400	1/4	0.47	250 PSI
49.5600	3/8	0.61	250 PSI
49.5700	1/2	0.75	250 PSI

Applications

- Ideal for compressed air, cold or hot water, hot lubrication oils or diesel fuel
- Recommended for construction, automotive repair shops, agriculture, manufacturers, forestry and mining industries

Features

- Light and ergonomic
- High resistance to petroleum base hydraulic oils
- Flexible even at very cold temperatures

Specifications

Maximum Working Pressure

300 PSI

Working Temperature

-40°C to 71°C (-40°F to 160°F)

Construction

Cover : Oil Resistant Neoprene

Tube : Synthetic Rubber

Reinforcement : Braided Synthetic Fibers

Color

Black

Recommended Fittings


Push-On Fittings (Series 33)



CUT LENGTH WITH OR WITHOUT FITTINGS






250 PSI



25'	Part No.			Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
	50'	100'				
49.5425	49.5450	49.5490	1/4	w/o fitting	250 PSI	
49.5426	49.5456	49.5496	1/4	1/4	250 PSI	
49.5625	49.5650	49.5690	3/8	w/o fitting	250 PSI	
49.5626	49.5656	49.5696	3/8	1/4	250 PSI	
49.5725	49.5750	49.5790	1/2	w/o fitting	250 PSI	
49.5726	49.5756	49.5796	1/2	3/8	250 PSI	

IDEAL FOR CONSTRUCTION AND AUTOMOTIVE REPAIR SHOPS




OTHER SIZES AVAILABLE ON REQUEST : 49.5400, 49.5600, 49.5700 HOSE (R500' APPROX. REEL)

Silicone-free conception, ideal for paint shops
Reduces risk of fisheyes in paint jobs

500' REEL



300 PSI



Part No.	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
49.6400	1/4	0.49	300 PSI
49.6600	3/8	0.63	300 PSI
49.6700	1/2	0.77	300 PSI
49.6900	3/4	1.05	300 PSI

CUT LENGTH WITH OR WITHOUT FITTINGS





300 PSI



Part No.				Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
25'	35'	50'	100'			
49.6425	49.6435	49.6450	49.6490	1/4	w/o fitting	300 PSI
49.6426	49.6436	49.6456	49.6496	1/4	1/4	300 PSI
49.6625	49.6635	49.6650	49.6690	3/8	w/o fitting	300 PSI
49.6626	49.6636	49.6656	49.6696	3/8	1/4	300 PSI
49.6725	49.6735	49.6750	49.6790	1/2	w/o fitting	300 PSI
49.6726	49.6736	49.6756	49.6796	1/2	3/8	300 PSI
49.6925	49.6935	49.6950	49.6990	3/4	w/o fitting	300 PSI
49.6926	49.6936	49.6956	49.6996	3/4	3/4	300 PSI

IDEAL FOR PAINT SHOPS

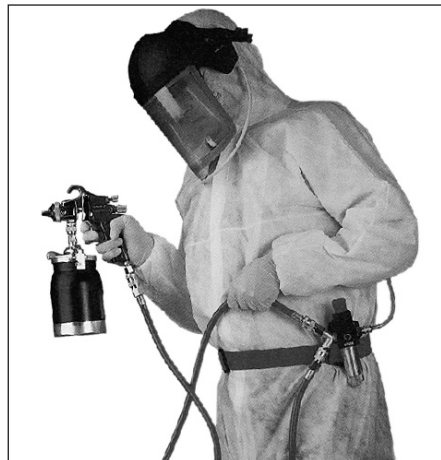

GREEN



Applications

- Ideal for paint shops
- Special silicone free design hose for paint applications
- For compressed air, water, antifreeze and petroleum-based solvents
- Recommended for construction, manufacturing, automotive and petrochemical industries

Features

- Greatly reduces risk of fisheyes in paint jobs
- Allows easy mounting of push-on type fittings
- Lighter and more flexible for better handling
- Silicone-free compound that will not contaminate paint solutions
- High resistance to petroleum-based hydraulic oils

Specifications

Maximum Working Pressure

300 PSI

Working Pressure

-29°C to 100°C (-20°F to 212°F)

Construction

Cover : Type C Nitrile

Tube : Type C Nitrile

Reinforcement : Aramid cords

Recommended Fittings

Push-On Type Fittings (Series 33)



SAND YELLOW



Applications

- Specially designed for construction, mining, forestry and industrial applications
- Ideal for high pressure air tools

Features

- Flexible to handle
- Heavy-duty hose for severe applications
- Excellent resistance to abrasion and demanding environments

Specifications

Maximum Working Pressure

300 PSI or 400 PSI

Working Temperature

-40°C to 93°C (-40°F to 200°F)

Construction

Cover : Synthetic Wrapped Rubber

Tube : Synthetic Rubber (seamless)

Reinforcement : High Tensile Synthetic Cord

Recommended Fittings

Camlock Fittings for Construction (Series 28)


Hose Clamps (Series 39)

For the most demanding applications

HOSE WITHOUT FITTING



300 PSI




Part No.	Hose I.D. in.	Hose O.D. in.	Length ft
49.8305	1/2	0.93	50
49.8307	3/4	1.14	50
49.8310	1	1.38	50
49.8312	1-1/4	1.73	50
49.8315	1-1/2	1.97	50
49.8320 (250 PSI)	2	2.56	50
49.8325	2-1/2	3.03	50
49.8330 (250 PSI)	3	3.62	50
49.8340	4	4.65	50

HOSE WITHOUT FITTING




400 PSI



Part No.	Hose I.D. in.	Hose O.D. in.	Length ft
49.8405	1/2	0.93	50
49.8407	3/4	1.14	50
49.8410	1	1.38	50
49.8412	1-1/4	1.73	50
49.8415	1-1/2	1.97	50
49.8420	2	2.56	50

IDEAL FOR THE CONSTRUCTION, MINING AND FORESTRY INDUSTRIES

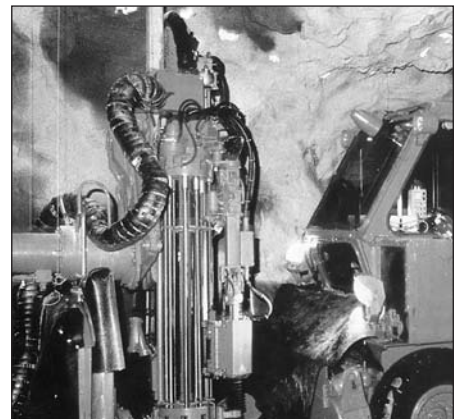

NEW

BREATHING AIR HOSE

Part No.	Hose I.D. po.	Colour	Length ft
49.7600	3/8	Black	300