

### *Ergonomics improves productivity*



#### LIGHTWEIGHT TOOL BALANCER 1-8 LBS

##### Features

- Industrial quality durable steel cable
- Easy tension adjustment
- Nylon coated steel cable for smooth and long lasting performance
- Convenient 360° swivel and clevis pin hanger for easy mounting
- Ratchet lock for models (51.2206, 51.2208)
- High-impact molded nylon composite case
- To be used with secondary support chain model A for 51.1202 and 51.1204, and model B for others



| Part No. | Part No. ratchet lock | Weight capacity lbs | Cable length ft. |
|----------|-----------------------|---------------------|------------------|
| 51.1202  | -                     | 1 - 2               | 5.2              |
| 51.1203  | -                     | 1 - 2               | 10.0             |
| 51.1204  | -                     | 2 - 4               | 5.2              |
| 51.1206  | 51.2206               | 4 - 6               | 6.6              |
| 51.1208  | 51.2208               | 6 - 8               | 6.6              |



#### STANDARD DUTY TOOL BALANCER 6-24 LBS

##### Features

- Durable steel cable provides smooth operation
- Load is secured by automatic drum lock even if tension drops suddenly
- Convenient 360° swivel and clevis pin hanger for easy mounting
- High-impact molded nylon composite case
- Optional ratchet lock allows cable locking at desired position
- Use secondary support chain model D

| Part No. | Part No. ratchet lock | Weight capacity lbs | Cable length ft. |
|----------|-----------------------|---------------------|------------------|
| 51.1309  | 51.2309               | 6 - 9               | 6.6              |
| 51.1313  | 51.2313               | 9 - 13              | 6.6              |
| 51.1318  | 51.2318               | 13 - 18             | 6.6              |
| 51.1324  | 51.2324               | 18 - 24             | 6.6              |



Automatic drum lock to secure load even if tension drops suddenly



#### STANDARD DUTY STEEL CAST TOOL BALANCER 1-15 LBS

##### Features

- Durable cable easy to replace
- Easy tension adjustment
- Steel aircraft cable of 3/32" dia.
- High-impact steel case
- Optional ratchet lock allows cable locking at desired position
- Use secondary support chain model B

| Part No. | Part No. ratchet lock | Weight capacity lbs | Cable length ft. |
|----------|-----------------------|---------------------|------------------|
| 51.1405  | 51.2405               | 1 - 5               | 8                |
| 51.1410  | 51.2410               | 4 - 10              | 8                |
| 51.1415  | 51.2415               | 8 - 15              | 8                |




## HEAVY DUTY CAST ALUMINUM TOOL BALANCER 80 - 200 LBS

| Part No. | Weight capacity lbs | Cable length ft. |
|----------|---------------------|------------------|
| 51.1815  | 85 - 115            | 7                |
| 51.1825  | 115 - 125           | 7                |
| 51.1835  | 125 - 135           | 7                |
| 51.1845  | 135 - 145           | 7                |
| 51.1855  | 145 - 155           | 7                |
| 51.1865  | 155 - 165           | 7                |
| 51.1875  | 160 - 175           | 7                |
| 51.1888  | 175 - 195           | 7                |
| 51.1890  | 190 - 200           | 7                |
| 51.1892  | 80 - 110            | 9                |
| 51.1894  | 115 - 125           | 9                |
| 51.1896  | 125 - 130           | 9                |
| 51.1898  | 145 - 200           | 9                |

### Features

- Extra durability with high tensile strength cast aluminum
- Premature failure is prevented by a Wear-Guard coated drum that protects the cable and drum
- Quick and easy tool changes with manual drum lock
- Load is secured by automatic drum lock even if tension drops suddenly
- Full range of motion with 360° swivel hanger
- Use secondary support chain model C

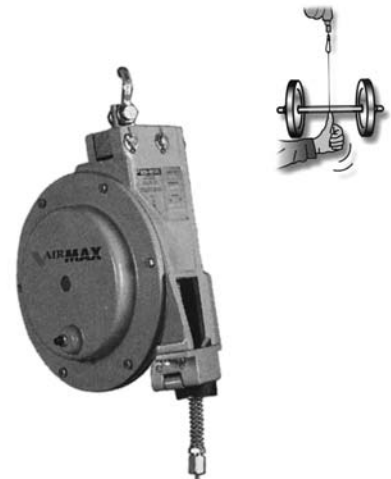

Load is secured by automatic drum lock even if tension drops suddenly

## HEAVY DUTY CAST ALUMINUM TOOL BALANCER 155 - 300 LBS

| Part No. | Weight capacity lbs | Cable length ft. |
|----------|---------------------|------------------|
| 51.1910  | 175 - 210           | 7                |
| 51.1935  | 210 - 235           | 7                |
| 51.1950  | 235 - 250           | 7                |
| 51.1965  | 250 - 265           | 7                |
| 51.1980  | 265 - 280           | 7                |
| 51.1990  | 280 - 290           | 7                |
| 51.1991  | 290 - 300           | 7                |
| 51.1992  | 155 - 165           | 9                |
| 51.1993  | 180 - 190           | 9                |
| 51.1994  | 200 - 210           | 9                |
| 51.1995  | 210 - 215           | 9                |

### Features

- Long life and trouble-free service with cast aluminum construction
- Premature failure is prevented by a Wear-Guard coated drum that protects the cable and drum from excessive wear
- Quick and easy tool changes with manual drum lock
- Load is secured by automatic drum lock even if tension drops suddenly
- 3/16" steel cable diameter
- Full range of motion with 360° swivel hanger
- Use secondary support chain model C



Load is secured by automatic drum lock even if tension drops suddenly