


FLOW CHARACTERISTICS

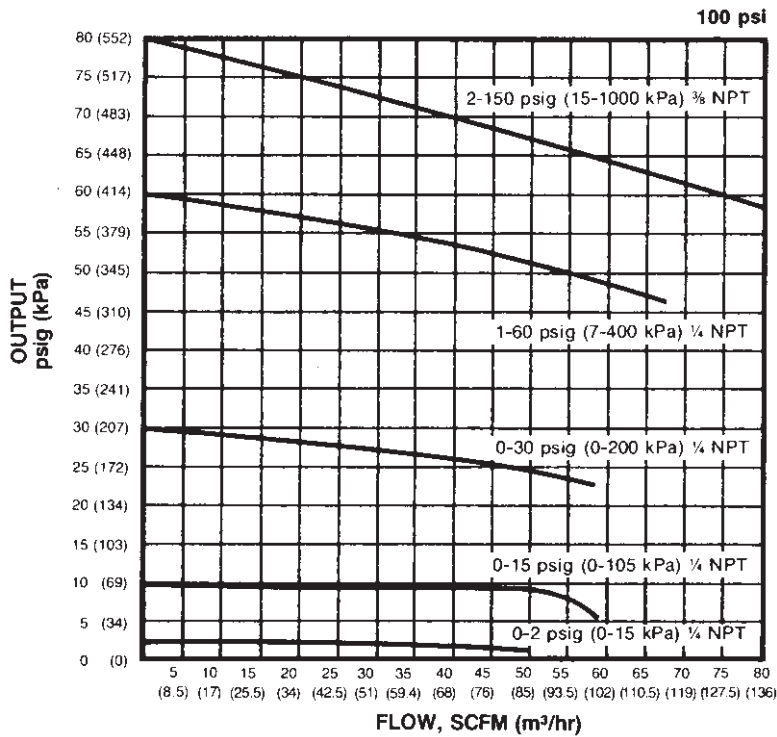

Applications

- Ideal to maintain output pressure under high flow conditions.

Features

- Allows flows up to 80 SCFM
- Controls output pressure to within 1/4 inch water column pressure
- Dampening action of aspirator tube makes this regulator insensitive to changes in flow
- Can be serviced without removal from air line

Specifications

Exhaust Capacity

4 SCFM

Effect of Supply Pressure Variation on Output

Less than 0.1 psi for 100 PSI change

Maximum air consumption

From 1.0 to 12.5 SCFH

Supply Pressure Maximum

250 PSI

Construction

Body : Aluminium

Internal : Stainless steel, brass, plated steel, acetal

Diaphragm : Elastomer, polyester

Knob : Plastic

Part No.	(F) NPT	PSI
56.3105	1/16"	0 - 5
56.3115	1/16"	0 - 15
56.3202	1/4"	0 - 2
56.3215	1/4"	0 - 15
56.3220	1/4"	0 - 30
56.3225	1/4"	0 - 150
56.3302	3/8"	0 - 2
56.3315	3/8"	0 - 15

Gauge not included